

Application



Chip Brushes

Sizes	2", 3", 4"
Box Qty	24pcs - 2" 12pcs - 3", 4"
•Natural wood handle •White Chinese bristle •Steel ferrule	



4" x 3/8" Nap Roller Covers

Case qty	12
•General purpose •Polypropylene core •3/8" nap	



9" x 1/2" Nap Roller Covers

Case qty	24
•General purpose •Polypropylene core •1/2" nap	



9" x 3/8" Nap Roller Covers

Case qty	50
•General purpose •Polypropylene core •3/8" nap	



9" x 3/8" Deluxe Phenolic Roller Cover

Case qty	72
•Solvent resistant core •Phenolic core •3/8" nap	



Fiberglass Pole

Case qty	12
Size	15/16" x 60"
Lightweight durable yellow fiberglass pole with metal threaded tip	



Metal Threaded Tip

Case qty	12
Size	1 1/8" x 60"
Wooden pole with metal threaded tip	



Tapered Tip

Case qty	12
Size	1 1/8" x 60"
Wooden pole with tapered tip	



4" Roller Frame

Case qty	12
•4" Four (4) wire design •Threaded handle hole •1/4" stem	



9" HD Roller Frame

Case Qty	12
•9" Five (5) wire design •Reinforced threaded handle hole •5/16" Heavy duty stem	



9" Long Stem Roller Frame

Case Qty	12
•Elongated stem designed to keep handle out of what you are applying for longer handle life •9" Five (5) wire design •Reinforced threaded handle hole •5/16" Stem	



7" Roof Brush

Case Qty	6
•Tampico bristles •Caustic chemical resistant •Suitable for medium to rough scrubbing •Threaded hole for pole	



Straight Blade Squeegee

Manufacturer	Haviland Corp
Sizes	18", 24"
•16 gauge plated frame •1/4" x 2" rubber blade •Requires 1 1/8" tapered pole (sold separately)	



V-Notched Squeegee

Manufacturer	Haviland Corp
Sizes	18", 24"
•Heavy duty 14 gauge red powder-coated frame •1/4" notch 1/4" x 2" neoprene rubber blade •Requires 1 1/8" tapered pole (sold separately)	

Caulk Guns

Albion
Dispensing Solutions



B-12

Manufacturer	Albion
•10oz Smooth rod cartridge gun •12:1 mechanical advantage drive •Full sized handle for comfortable, efficient dispensing •Half-cradle carriage to securely hold standard sized sealant cartridges •Built-in cartridge puncture wire	

NEWBORN



Model #77 Standard Ratchet Gun

Manufacturer	Newborn
•Ideal for latex & silicone caulks •Extra deep ratchet teeth for prolonged use •Improved handle for comfort •heavy duty welded steel construction	



Powers 10oz Caulk Gun

Manufacturer	Powers
•10oz Smooth rod caulk gun •Half-cradle carriage to securely hold sealant cartridge •Full sized handle •Full metal handle design for added durability	



Sausage Gun

Manufacturer	Albion
Styles	10oz, 20oz
•Double Gripping Plate technology for long life •Rotating Swivel Barrel •Includes: 3 clear nozzles, 3 black nozzles, 2 extra pistons, 1 bulk piston (20oz only) •Designed to dispense sausage packs	



Powers 8484

Manufacturer	Powers
•AC100+ Gold •8oz STD •All metal manual tool	



Powers 8485

Manufacturer	Powers
•AC100+ Gold •8oz, 10oz, & 12oz •High performance manual tool	



Powers 8494

Manufacturer	Powers
•AC100+ Gold •28oz STD •All metal manual tool	

Cornerbead Tools

GRABBER
CONSTRUCTION PRODUCTS
"The Professional's Choice"



Ultratool Outside 90 Roller	
Manufacturer	Grabber
Application	Ultratrim outside 90Corners
Details •Stainless steel rollers with nylatron and brass bushings •Stainless steel frame and hardware Features/Benefits •Ensures high speed, accurate installations •Highly durable •Squeezes out excess mud •Taper matches exact corner profile •Stainless steel components provide extreme corrosion resistance	

GRABBER
CONSTRUCTION PRODUCTS
"The Professional's Choice"



Ultratool Bullnose Roller	
Manufacturer	Grabber
Application	Ultratrim 3/8" and 3/4" Bullnose corners
Details •Stainless steel rollers with nylatron and brass bushings •Stainless steel frame and hardware Features/Benefits •Ensures high speed, accurate installations •Highly durable •Squeezes out excess mud •Taper matches exact corner profile •Stainless steel components provide extreme corrosion resistance	

Ultratool Rollers press corners firmly and accurately into place, creating an absolute bond to the drywall. Installations are faster and easier, delivering bottom-line savings on labor and mud.

GRABBER
CONSTRUCTION PRODUCTS
"The Professional's Choice"



Ultratool Inside 90 Roller	
Manufacturer	Grabber
Application	Ultratrim inside 90 Corners Ultraflex 325 off angles
Details •Stainless steel rollers with nylatron and brass bushings •Stainless steel frame and hardware Features/Benefits •Ensures high speed, accurate installations •Highly durable •Squeezes out excess mud •Taper matches exact corner profile •Stainless steel components provide extreme corrosion resistance	

GRABBER
CONSTRUCTION PRODUCTS
"The Professional's Choice"



Ultratool One-Sided Roller	
Manufacturer	Grabber
Application	Ultratrim L trim Corners Ultraflex off angles
Details •Stainless steel rollers with nylatron and brass bushings •Stainless steel frame and hardware Features/Benefits •Ensures high speed, accurate installations •Highly durable •Squeezes out excess mud •Taper matches exact corner profile •Stainless steel components provide extreme corrosion resistance	

Demo/Clean-Up

Valley



#10 Aluminum Scoop

Manufacturer	Valley Tools
Handle	30" Ash handle with D-grip 48" Ash handle
•#10 Aluminum scoop blade •Non-sparking, lightweight, and non-corrosive •Versatile multi purpose scoop shovel •USA ash hardwood handle •Assembled in USA	

Valley



#12 Poly Scoop

Manufacturer	Valley Tools
Handle	30" wood handle with D-grip
•14-3/4" x 18-3/4" blade is equivalent to a #12 scoop but will hold up to 15% more than a normal scoop head •Heavy duty polypropylene material is designed for rough work •Lighter polypropylene head reduces stress to the user	

Valley



#10 Steel Scoop

Manufacturer	Valley Tools
Handle	30" Ash handle with D-grip 48" Ash handle
•#10 Steel scoop blade •Versatile multi purpose scoop shovel •USA ash hardwood handle •Assembled in USA	

Valley



Serrated Tear Off Blade

Manufacturer	Valley Tools
Handle	30" Ash handle with D-grip 48" Fiberglass handle
•7-3/8" x 12" Heavy duty notched blade for removing shingles and tiles •Heavy duty welded fulcrum for leverage •Forged from high carbon steel	



Shingle Remover

Manufacturer	Roof Zone
Size	54"
For removal of •Asphalt shingles •Cedar shakes •Underlayments •Etc. •Vinyl grip handle for added comfort •Heat tempered teeth	



Spud Bar

Manufacturer	Roof Zone
Size	7" Blade 54 1/2" Overall
•Heavy duty steel tube design •Knob handle •Replaceable hardened steel blade For removal of •Old roofing •Slag & gravel •Eliminating fasteners •Ect.	




Roofers Spade

Manufacturer	Roof Zone
Types	Spade w/ wide heel & steel handle
	Spade w/ wide heel & solid core fiberglass handle
•7" x 11" spade •6" x 9" extra wide heel •61" overall	



Serrated Roofers Spade

Manufacturer	Roof Zone
	Serrated spade w/ wide heel & steel handle
	Serrated spade w/ wide heel & solid core fiberglass handle
•7" x 11" spade •6" x 9" extra wide heel •61" overall	



Core Cutter

Manufacturer	Roof Zone
--------------	-----------

Obtain core samples from substrates for determining moisture content or other analysis. Handles are removable. Removes 7" core samples. Made of specially machined hardened steel with sharpened teeth. Teeth may be re-sharpened.



Palmyra Bristle Plush Broom

Size	24"
------	-----

- Indoor/Outdoor
- 100% stiff Palmyra 4" bristle
- Threaded handle pole
- Hardwood block
- Good for rough sweeping
- Able to sweep in wet or dry conditions



Straight Blade Squeegee

Manufacturer	Haviland Corp
--------------	---------------

Sizes	18", 24"
-------	----------

- 16 gauge plated frame
- 1/4" x 2" rubber blade
- Requires 1 1/8" tapered pole (sold separately)



Contractor Bags

- 20 bags per roll with ties
- 7 bushel capacity
- 3 mil thick
- Made in USA



6 mil Poly Sheeting

Size	20 x 100'
------	-----------

- Use for dust or sawdust abatement
- Moderate protection for interior or exterior jobs
- Provides a barrier against vapor and airborne particles
- 6 mil sheeting suitable for use in excavation and gardening applications

FLEECE

COTTON



White Rags

- 25lb bundles
- Available in cotton or fleece
- All white



Roofers Pitch Hood

Breathable dacron material protects workers from pitch fumes. Complete face and neck coverage. Lightweight and washable. Use over and over again. Will not stretch out.



Tapered Tip

Case qty	12
Size	1 1/8" x 60"
Wooden pole with tapered tip	



Metal Threaded Tip

Case qty	12
Size	1 1/8" x 60"
Wooden pole with metal threaded tip	



Fiberglass Pole

Case qty	12
Size	15/16" x 60"
Lightweight durable yellow fiberglass pole with metal threaded tip	



Tarps

Sizes	20'x20', 20'x30', 20'x40', 40'x60'
Colors	Blue, Black, Silver
•Ideal for ground cover, truck cover, machinery cover, and many other uses •Water resistant •Mildew resistant •Tear resistant •Rustproof aluminum grommet	



Heavy Duty Wheelbarrow

Manufacturer	Roof Zone
Wheelbarrow features heavy duty welded tube frame for greater strength and longer life, extended handles for reduced user fatigue, and tubular front plate preventing tray damage. The dual wheel design provides improved balance, preventing job site materials from falling out due to tip over. Capacity is 6 cubic feet.	



NFL Long Handle Double Steel Wheelbarrow

Manufacturer	Roofmaster
This is a Roofmaster Steel Handled wheelbarrow with two pneumatic 400 x 8 Non Flat Lite wheels, Long Steel Handles with cushioned hand grips, a 6 cubic foot Steel Tray and includes a Dump Plate in front to help from tearing up the roof deck when dumping. This wheelbarrow is designed so that you don't hit your shin on the front brace. This wheelbarrow will transport like it were on a rail and without any annoying flat tires.	

Gas Fastening



Tool Currently Unavailable



C3

Manufacturer	Powers
General Applications and Uses •Attaching steel track to concrete, block, or steel •Attaching plywood to concrete or block •Attaching lath to concrete, block, or steel •Attaching furring strips to concrete or block Features and Benefits •No licensing required •Each fuel cell can install up to 1,000 fasteners •Available for use with Stick-E accessories •Short or long track versions	

Pins, Fuel, and Full Service are STILL available



C4

Manufacturer	Powers
General Applications and Uses •Attaching wood to concrete, block, or steel •Attaching steel to concrete, block, or steel •Attaching plywood to steel •Attaching steel track to concrete Features and Benefits •No licensing required •Each fuel cell can install up to 800 fasteners •Increased power and durability •Handles up to 2-9/16" length fasteners •Pin diameter range 0.102" to 0.145"	



C5

Manufacturer	Powers
General Applications and Uses •Attaching steel track to concrete, block, or steel •Attaching plywood to concrete or block •Attaching lath to concrete, block, or steel •Attaching furring strips to concrete or block Features and Benefits •No licensing required •Each fuel cell can install up to 800 fasteners •Available for use with Stick-E accessories •Tracks removable •Adjustable depth control •Maintenance counter and LED indicator	

SIMPSON

Strong-Tie



GCN-MEP

Manufacturer	Simpson
Features •Easy magazine attachment with no extra tools •Power to drive .125" diameter pins •Pin-depth control dial •Easy nose piece change-out •High-voltage spark for cleaner fuel combustion •Comfortable, "sure-grip" rubber handle •Battery charge indicator light Key Fastening Applications •Conduit clips • Ceiling clips • Low-voltage cable • Cable straps •Drywall track to concrete, steel, CMU, or light-weight concrete on metal deck with magazine (Magazine sold separately)	

SIMPSON
Strong-Tie



GCN150

Manufacturer	Simpson
Features •40 pin magazine and 1,200 shot fuel cell reduce loading time •Automatic piston reset •Easy open jam release door •No possibility of firing with no pins Key Fastening Applications •Drywall track to concrete, steel, CMU, or metal deck •Furring strips to concrete, steel, or CMU •Plywood to concrete, steel, or CMU •Angle track to concrete, steel, or metal deck	

Ramset



Gypfast

Manufacturer	Ramset
Applications •Exterior gypsum sheathing to steel framing •Plywood and OSB sheathing/flooring •Fiber cement panel attachment - blocking-exterior walls •Windows/door bucks - specialty exterior sheathing •Woven mesh or expanded metal lath to steel framing Features •Fully automated w/150nail capacity •Fast set-up and tear down •Easy to use •1 1/2" - 2 1/2" pins	

***Gas Fastening Tools**

Each brand of Gas Fastening Tool requires

- Mfr specific fuel cell
- Mfr specific battery
- Mfr specific pins/accessories

Pins, accessories, batteries, and fuel cells are not interchangeable from Manufacturer to Manufacturer

Gas Accessories

Powers
FASTENERS



C-5 Track It Fuel Cell


Manufacturer	Powers
•Each box of pins contains 1 fuel cell •Available in a box of 20 •Each cell should do 800 pins	

Powers
FASTENERS



Track It Blue Fuel Cell

Manufacturer	Powers
Qty	20
•For Track It C-3 and C-4 •Each box of pins contains one fuel cell •Each cell should do 1000 pins •Works to 10 degrees	

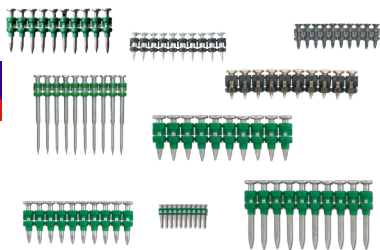

Track-It Pins

Manufacturer	Powers
Qty	800, 1000 w/Fuel Cell Included
•Standard pin length up to 1 1/2" (C-3, C-5) •C-4 can use up to 2 9/16" •Variety of styles and lengths per application •Specialty pins available •All three tools can fasten to steel	




Stick-E Accessories

Manufacturer	Powers
•Many styles available •Easy to use •Great mechanical and electrical trades	



Gypfast Fuel Cell

Manufacturer	Ramset
•Pins include fuel cell •Each cell should do about 1000 pins •Fuel cell liquid hydrocarbon	

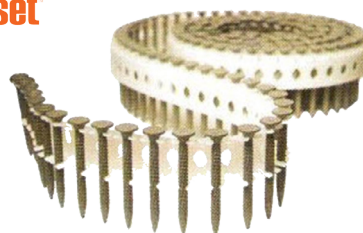

Gypfast Pins

Manufacturer	Ramset
•1 1/2" pin for single layer exterior sheathing •2" pin for double layer exterior gypsum sheathing •2 1/2" pin for multi-layers of sheathing, dimensional lumber •Pin cartons come with enough fuel cells to shoot entire carton	



Gypfast Accessories


Manufacturer	Ramset
Used to provide a wide holding area for fastening metal lath, waterproofing membrane, etc. to concrete/masonry. Washers quickly snap onto the Magnetic Nose Piece. Pins are then shot through the washers. •Lath disc magnetic nose piece •1 1/4" lath disc •1" lath disc	



GFC34

Manufacturer	Simpson
•Fuel cell included with each box of pins •Aprox. 1200 shots •Can operate from 20 - 120 degrees	


SIMPSON
Strong-Tie

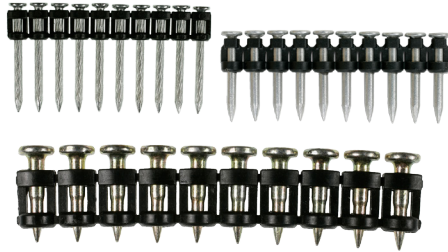

GCN150, GCN-MEP Pins

Manufacturer	Simpson
Qty	1000 Fuel Cell Included
•Concrete pins up to 1 1/2" long •Steel pins up to 3/4" long •Spiral knurled pin 1 3/8" long	

SIMPSON
Strong-Tie

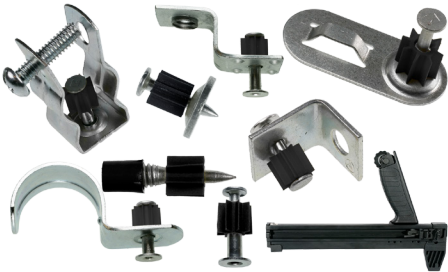

GCN150, GCN-MEP Accessories

Manufacturer	Simpson
•1" lathing washer & magnetic ring (GCN150) •Multiple styles of mechanical, electrical, and plumbing pins (GCN-MEP) •Magazine for GCN-MEP	



Ceiling Clip with Tie Wire

Pre-tied ceiling wire with clip for gas fired tools.

Tie Wire lengths available in:

- 6', 8', 10', 12'
- Custom lengths also available

Powder Actuated

Powers
FASTENERS



P3500

Manufacturer	Powers
Technical Data •Cast aluminum body •Load type .27 caliber 10 load strip •Uses 1/2"-3" pins General Applications •Conduit clip to concrete •Elect fixture to steel/concrete •Wood to concrete/steel •Concrete forming •Commercial and residential construction Suitable Base Materials •Normal weight concrete •Concrete masonry •Structural lightweight concrete •Steel	

Powers
FASTENERS



PA3500

Manufacturer	Powers
Modified version of the P3500 including a power adjuster Technical Data •Cast aluminum body •Load type .27 caliber 10 load strip •Uses 1/2"-3" pins General Applications •Conduit clip to concrete •Elect fixture to steel/concrete •Wood to concrete/steel •Concrete forming •Commercial and residential construction Suitable Base Materials •Normal weight concrete •Concrete masonry •Structural lightweight concrete •Steel	



Sniper Pole Tool

Manufacturer

Powers

Technical Data

- Composite body
- Load type .27 caliber 10 load strip
- Uses 1/2"-1 1/2" pins

General Applications

- Ceiling clip assemblies - metal track
- Forming applications
- Door frames
- Electrical fixtures to steel/concrete

Suitable Base Materials

- Normal weight concrete
- Concrete masonry
- Structural lightweight concrete
- Steel

Powder Accessories



.300 Head Drive Pin

Manufacturer

Powers

Qty

100

Drive pins with .300 head are designed for fastening a fixture to concrete, concrete block, and structural steel. The pins are formed with a 0.145" diameter shank, and a specially designed point to allow proper penetration into typical base materials. Knurled shank designs are available. Each pin is equipped with a flute to help guide pin during installation.



.300 Head Drive Pins with Top Hat

Manufacturer

Powers


Qty

100

Sizes

1/2" knurled, 5/8" knurled, 3/4", 1"

The .300 Head Drive Pins with Top Hat are used primarily for applications fastening drywall track to concrete or steel. They are assembled with a metal top hat to provide extra bearing surface against the drywall rack.



.300 Head Drive Pins with 1" Washer

Manufacturer

Powers

Qty

100

Sizes

1 1/4" - 3"

To provide resistance to pullover, these pins are available with pre-assembled 14 gage (0.075") metal washers in various diameters. The insulation washer has a thickness of 0.035"



Ballistic Point Drive Pins

Manufacturer

Powers

Qty

100

Sizes

1/2" - 1 7/8"

Premium Drive Pins with .300" diameter head and specially designed point to allow more consistent penetration into hard base materials. Manufactured with a 0.150" diameter straight and step shank in various lengths. A plastic flute is mounted over the point to retain the drive pin in the fastener guide of the tool providing guidance during the driving operation.



Ceiling Clip with Tie Wire

Pre-tied ceiling wire with powder actuated pin.

Powder Actuated Pin Length:

•1", 1 1/8", 1 1/4"

Tie Wire lengths available in:

•6', 8', 10', 12'

•Custom lengths also available



.25 Caliber Disk Loads

Manufacturer	Powers
Qty	100, 1000
•For Ramset D45, D60, D60L Available in •Gray (Weakest) •Brown •Green •Yellow (Strongest)	




.25 Caliber 10 Load Strip

Manufacturer	Powers
Qty	100, 1000
•For Powers P35S Available in •Green (Weakest) •Yellow (Stronger) •Red (Strongest)	



.27 Caliber Safety Strip Loads

Manufacturer	Powers
Qty	100, 1000
The safety strip is molded in a special length to provide a visual indication that the tool is loaded •For Powers P3500, PA3500, PA351, P3600 •For Ramset SA270, Viper Available in •Brown (Weakest) •Green •Yellow •Red (Strongest)	



Pins with Conduit Clip

Manufacturer	Powers
Qty	100, 25
For electrical trade, conduit clips are provided in various sizes for attaching conduit to base materials where easy removal is not a requirement. •1/2" EMT 1" pin •3/4" EMT 1 1/4" pin •3/4" EMT 1" pin •3/4" EMT 1 1/8" pin •1" EMT 1" pin	

Hand Tools



25' Tape Measure

- 10' of blade standout for increased user reach
- Duo-durometer blade lock for durability and comfort
- 1 1/8" wide blade with 1/8" markings to speed up measuring jobs
- Hook grabs construction materials from top and bottom
- Heat-treated spring for blade durability and smooth rewind
- Belt clip for easy attachment and storage



100' Chalk Line

- Heavy duty aluminum die-cast body for durability
- Felt gasket for uniformly distributed chalk
- Stainless steel hook and crank arm for abuse and corrosion resistance
- Tear-drop shape for use as a plumb bob



Chalk Refill

- 8oz red permanent chalk refill
- For exterior use
- Visible after weeks of weather exposure and jobsite wear



Utility Knives

- Retractable blade
- Multi-position
- In handle blade storage
- Heavy duty all metal construction



Snips

Manufacturer	Lenox
Styles	Aviation - Left, Right, Straight, and Bulldog
	Offset - Left, Right
•Precision-formed blades for Aviation and Bulldog snips •Bi-material blades for Offset snips •Reinforced chrome silicone valve-quality spring wire lasts for a lifetime •Over-molded handles won't slip or twist •Color-coded on both blades and handles plus arrow icons for easy tool recognition	



Roofing Trowel

- 7" x 3 3/8" gauging trowel
- Wood handle



20oz Rip Hammer

- Fiberglass core adds strength and durability in the handle, reduces vibration
- Yellow-colored shaft for easy product visibility
- Exclusive rim temper reduces incidences of chipping or spalling
- Rip claw
- Smooth face

Pneumatic



Aerico 90

Manufacturer	ET&F
--------------	------

The ergonomically designed Aerico 90 tool drives ASM-144 pins and AKN-144 pins into both steel and concrete substrates. At 150 psi air pressure, this tool will fasten plywood underlayment to concrete, or attach an OSB roof panel to 3/16" steel members. Adjust the air pressure to 120 psi and the Aerico 90 will fasten fiber cement siding to concrete masonry units. Each Aerico 90 is hand assembled when purchased.



ASM-144 AKN-144 Pins

Manufacturer	ET&F
--------------	------

ASM-144
•Smooth shank
•Used to fasten concrete and masonry substrates, and Hardie board to masonry

AKN-144
•Knurled shank
•Used to fasten plywood, osb, or lumber to steel members up to 3/16" thick

Both models of pins are available in plastic (30 pins/strip) and papers (25 pins/strip) collated. Available in lengths from 1 1/4" - 2 1/4"



GRTCR175

Manufacturer	Grip Rite
--------------	-----------

Includes

- Carrying case
- safety glasses
- hex wrenches
- tool oil
- 1/4" male plug
- Instruction manual

Specifications

- Firing mode: Bump fire
- Magazine capacity: 120
- Operating pressure: 70 - 120 PSI
- Fastener type: 15° coil roofing nails
- Collation: Wire weld
- Fastener range: 3/4" to 1 3/4"



GRTFC83

Manufacturer	Grip Rite
--------------	-----------

Includes

- Tool oil
- safety glasses
- hex wrenches
- Removable no-mar pad
- 1/4" male swivel plug
- Instruction manual

Specifications

- Firing mode: Selectable trigger
- Magazine capacity: 80
- Operating pressure: 70 - 120 PSI
- Fastener type: 30° - 34° offset round and clipped head framing nails
- Collation: Paper
- Fastener length: 2" - 3 1/4"
- Fastener diameter: .113" to .131"




GRTFR83

Manufacturer	Grip Rite
Includes	
•Tool oil	•1/4" male swivel plug
•safety glasses	•Instruction manual
•hex wrenches	
•Removable no-mar pad	
Specifications	
•Firing mode: Selectable trigger	
•Magazine capacity: 75	
•Operating pressure: 70 - 120 PSI	
•Fastener type: 21° round head framing nails	
•Collation: Plastic	
•Fastener length: 2" - 3 1/4"	
•Fastener diameter: .113" to .148"	



GRTFW83

Manufacturer	Grip Rite
Includes	
•Tool oil	•1/4" male swivel plug
•safety glasses	•Instruction manual
•hex wrenches	
•Removable no-mar pad	
Specifications	
•Firing mode: Selectable trigger	
•Magazine capacity: 95	
•Operating pressure: 70 - 120 PSI	
•Fastener type: 28° wire weld framing nails	
•Collation: Wire weld	
•Fastener length: 2" - 3 1/4"	
•Fastener diameter: .113" to .131"	

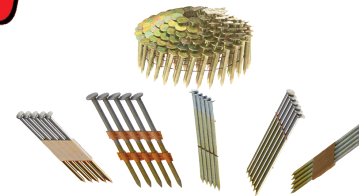

Grip Rite Nails

Manufacturer	Grip Rite
Framing	
•Available from .113 - .148 thick, 2" 3 1/4" long	
•Ring of smooth shank	•28° wire weld
•21" round head	•30° clipped or full head
Roofing	
•Available from 3/4" - 1 3/4" long, ring or smooth shank	
•15° coil roofing nails	
Coatings	
•Electrogalvanized	•Hot dipped
•Stainless steel	•Bright coated
•PrimeGuard plus	



Pneutek System

Manufacturer	Pneutek
The Pneutek system is for the attachment of steel roof and floor decking. The Air/Safe fastening system.	
•Ergonomic stand up tool design	
•Uni-construction fasteners for highest shear strength	
•Fastens into unlimited steel thickness including 100ksi, type A992 steel	
•Lowest in place fastener cost	
•Highest corrosion resistant fasteners	
•Completely Pneutek no explosives	

2231 S. Market St.
Mechanicsburg, PA 17055
Phone: 717-458-5610
Fax: 717-458-5613



6 Poulson Ave./P.O. Box 156
Essington, PA 19029
Phone: 610-521-3404
Fax: 610-521-4717

PNEUTEK®



SDK63075 K66062 Pneutek Pins

Manufacturer

Pneutek

SDK63075

- For steel substrate thickness .155" - .250"
- White strip color coded •10 pins per strip
- Step down knurled shank •3/4" long

K66062

- For steel substrate thickness .281 and up
- Orange strip color coded •10 pins per strip
- Straight knurled shank •5/8" long

DeWalt Cordless



DCF885C2

Manufacturer	DeWalt
20v MAX Lithium Ion 1/4" Impact Driver Kit	
Volts	20V Max
Drive Size	1/4" Max Shank quick release
No Load Speed	2,800 RPM
Impacts/Min	3,200 RPM
Torque	1,400 in-lbs / 117 ft-lbs
Tool Length	5.5"



DCF885M2

Manufacturer	DeWalt
20v MAX Lithium Ion 1/4" Impact Driver Kit	
Volts	20V Max
Drive Size	1/4" Max Shank quick release
No Load Speed	2,800 RPM
Impacts/Min	3,200 RPM
Torque	1,400 in-lbs / 117 ft-lbs
Tool Length	5.5"



DFC895M2

Manufacturer	DeWalt
20v MAX XR Lithium Ion Brushless 1/4" 3-Speed Impact Driver	
Volts	20V Max
Drive Size	1/4" Max Shank push button release
No Load Speed	0-2,850/1,900/952 RPM
Impacts/Min	0-3,300/2,400/1,300 IPM
Torque	1,500/900/500 in-lbs / 125 ft lbs
Tool Length	5 1/4"



DCG412M2

Manufacturer	DeWalt
20v MAX Lithium Ion 4-1/4" Cut-Off Tool Kit	
Volts	20V Max
No Load Speed	6,500 RPM
Spindle Lock	Yes
Spindle Thread	5/8"



DCF889M2

Manufacturer	DeWalt
20v MAX Lithium Ion 1/2" Impact Wrench Kit with Detent Pin Anvil	
Volts	20V Max
Drive Size	1/2" Square w/detent Pin Anvil
No Load Speed	0-1,500 RPM
Impacts/Min	0-2,300 IPM
Torque	3,600 in-lbs / 300 ft-lbs
Tool Length	10 3/4"



DCH253M2

Manufacturer	DeWalt
20v MAX Lithium Ion SDS 3-Mode Rotary Hammer Kit	
Volts	20V Max
Chuck Type	SDS Plus
No Load Speed	0-1,200 RPM
Blow/Min	0-4,500 BPM
Impact Energy	1.7 ft-lbs
Concrete Optimum	5/32" - 1/2"



DCK290L2

Manufacturer	DeWalt
20v MAX Lithium Ion 2-Tool Combo Kit	
Hammer Drill	DCD985
Impact Driver	DFC885



DCS391M1

Manufacturer	DeWalt
20v MAX Lithium Ion 6-1/2" Circular Saw Kit	
Volts	20V Max
No Load Speed	3,700 RPM
Blade Diameter	6 1/2"
Bevel Capacity	0° - 50°
Depth of Cut at 45°	1 5/8"
Depth of Cut at 90°	2 1/4"



DCS370K	
Manufacturer	DeWalt
18v XRP Band Saw	
Volts	18V
Ft/Min	570 FPM
Blade Length	32 7/8"
Max Capacity	2 1/2"
Tool Length	15"



DCS380M1	
Manufacturer	DeWalt
20v MAX Lithium Ion Reciprocating Saw Kit	
Volts	20V Max
Stroke/Min	0-3,000 SPM
Stroke Length	1 1/8"
Keyless Blade Clamp	Yes, 4 position
Adjustable Shoe	Yes
Electric Brake	Yes

DeWalt Coded



D25213K	
Manufacturer	DeWalt
1" D-Handle 3-Mode SDS Hammer Drill	
Optimal Concrete Drilling	5/32" - 5/8"
Amps	8.0 Amps
Impact Energy	2.5 ft-lbs
No Load Speed	0-1,150 RPM
Blows/Min	0-4,300 BPM
Vibration Measurement	21 m/s ²
Clipping	Yes
Clutch	Yes



D28402	
Manufacturer	DeWalt
4-1/2" Small Angle Grinder	
Amps	10 AC/DC Amps
Max Watts Out / Horsepower	1,200W / 1.6 HP
No Load Speed	11,000 RPM
Spindle Thread	5/8" - 11
Switch Type	Paddle w/ Lock-On
Dust Ejection System	Yes
Tool-Free Flange System	Yes



DW130V

Manufacturer	DeWalt
1/2" Spade Handle Drill	
Chuck Size	1/2"
Amps	9.0 Amps
No Load Speed	0-550 RPM
Max Watts Out	600W
Kit Box	No
Mechanical Clutch	No
Capacity in Wood (Auger Bit)	1 1/2"
Capacity in Steel (Twist Bit)	1/2"
Capacity in Steel (Hole Saw)	3"



DW255

Manufacturer	DeWalt
5,300 rpm High Speed VSR Drywall Scrugun	
Amps	6.0 Amps
No Load Speed	0-5,300 RPM
Clutch	Standard
Torque	60 in-lbs
Max Fastener Size	#8



DW281

Manufacturer	DeWalt
2,500 rpm VSR Positive-Clutch Scrugun with 1/4" Bit Holder	
Amps	6.5 Amps
No Load Speed	0-2,500 RPM
Clutch	Positive
Torque	132 in-lbs
Max Fastener Size	#14



DW284

Manufacturer	DeWalt
2,500 rpm VSR Positive-Clutch Scrugun with Threaded Clutch Housing	
Amps	6.5 Amps
No Load Speed	0-2,500 RPM
Clutch	Positive
Torque	132 in-lbs
Max Fastener Size	#14



DW268	
Manufacturer	DeWalt
2,500 rpm VSR VERSA-CLUTCH Scrugun	
Amps	6.5 Amps
No Load Speed	0-2,500 RPM
Clutch	Vera Clutch System
Torque	132 in-lbs
Max Fastener Size	#14



DW311K	
Manufacturer	DeWalt
13 Amp Reciprocating Saw Kit	
Amps	13 Amps
Strokes/Min	0-2,700 SPM
Stroke Length	1 1/8"
Keyless Blade Clamp	Twist
4 Position Blade Clamp	No
Adjustable Shoe	Yes
Variable Speed Trigger	Yes
Variable Speed Dial	Yes
Orbital Action	Yes
Anti-Slip Comfort Grip	Yes



DW304PK	
Manufacturer	DeWalt
10 Amp Reciprocating Saw Kit	
Amps	10 Amps
Strokes/Min	0-2,800 SPM
Stroke Length	1 1/8"
Keyless Blade Clamp	Lever
4 Position Blade Clamp	Yes
Adjustable Shoe	Fixed
Variable Speed Trigger	Yes
Variable Speed Dial	No
Orbital Action	No
Anti-Slip Comfort Grip	No



DW331K	
Manufacturer	DeWalt
Variable Speed Top-Handle Jig Saw Kit	
Amps	6.5 Amps
Strokes/Min	500-3,100 SPM
Stroke Length	1"
Keyless Blade Clamp	Yes
Dust Blower	Yes
Orbital Action	4 Position



DW317K	
Manufacturer	DeWalt
Compact Jig Saw Kit	
Amps	6.5 Amps
Strokes/Min	500-3,100 SPM
Stroke Length	1"
Keyless Blade Clamp	Yes
Dust Blower	Yes
Orbital Action	4 Position



DW328	
Manufacturer	DeWalt
Deep Cut Variable Speed Porta-Band Saw	
Amps	6.0 AC/DC Amps
Ft./Min.	100-245 FPM
Max Capacity (Rectangular)	4 3/4"
Max Capacity (Round)	4 1/2" x 4 3/4"
Front Handle Style	Pommel



DW364	
Manufacturer	DeWalt
7-1/4" Circular Saw with Rear Pivot	
Amps	15 Amps
Max Watts Out	2,075W
No Load Speed	5,800 RPM
Bevel Capacity	50°
Bevel Stops	N/A
Rear Pivot	Yes
Electric Brake	Yes
Blade Diameter	7 1/4"
Depth of cut at 90°	2 7/16"
Depth of cut at 45°	1 7/8"



DWE575	
Manufacturer	DeWalt
7-1/4" Lightweight Circular Saw	
Amps	15 Amps
Max Watts Out	1,950W
No Load Speed	5,200 RPM
Bevel Capacity	57°
Bevel Stops	45°/22.5°
Rear Pivot	N/A
Electric Brake	N/A
Blade Diameter	7 1/4"
Depth of cut at 90°	2.55"
Depth of cut at 45°	1 7/8"

DeWalt Radios



DC011	
Manufacturer	DeWalt
Worksite Charger/Radio	
Power Source	7.2V to 18V Battery
AM/FM	Yes
Aux. Port	Yes
Charges Batteries	NiCd & Lithium Ion
Does not work with 12V Max, 20V Max, or Uni-volt	



DCR015	
Manufacturer	DeWalt
Charger/Radio	
Power Source	12V Max and 20V Max Battery
AM/FM	Yes
Aux. Port	Yes
Charges Batteries	Lithium Ion
Does not work with 18V batteries and other stem packs batteries	



DC012	
Manufacturer	DeWalt
Worksite Charger/Radio	
Power Source	7.2V to 18V Battery
AM/FM	Yes
Aux. Port	Yes
Charges Batteries	NiCd & Lithium Ion
Does not work with 12V Max, 20V Max, or Uni-volt	



DC018	
Manufacturer	DeWalt
Worksite Radio	
Power Source	12V Max, 18V, 20V Max Battery
AM/FM	Yes
Aux. Port	Yes
Charges Batteries	NiCd & Lithium Ion
Device storage box protects digital audio devices from jobsite debris and damage USB Power port allows device to be charged via USB when radio is plugged into AC wall outlet	

DeWalt Lasers



DW0851

Manufacturer	DeWalt
--------------	--------

Self Leveling Spot Beams and Horizontal Line

- Projects 5 bright spot beams for accurate plumb and horizontal point transfer
- Rear projecting horizontal line aids in additional leveling applications
- Projects down beam with raised clearance provides dot visibility and alignment for wall track layout
- Integrated magnetic pivoting base with 1/4" thread front and rear mounted magnets allow flush attachment to metal track and steel
- Full-time pulse mode allows use with detector maintains full brightness for visibility
- Locking pendulum to help prevent damage to internal components



DW088K

Manufacturer	DeWalt
--------------	--------

Cross Line Laser

Projects bright crossing horizontal and vertical lines for various leveling and layout applications. Maintains full brightness for visibility and extends range



DW088K

Manufacturer	DeWalt
--------------	--------

Cross Line Laser

Projects bright crossing horizontal and vertical lines for various leveling and layout applications. Maintains full brightness for visibility and extends range

Metabo Cordless

metabo
work. don't play.



ASE18LTX

Manufacturer	Metabo
18 volt Cordless Sabre Saw	
•Strokes in idle 0-2700 /min •Saw blade stroke 1 3/16" •To saw wood, plastics, metal pipes and profiles and much more •Softgrip handle for comfortable sawing in every working position •Aluminum die-cast gear housing •Quick change blade •Adjustable depth guide	

metabo
work. don't play.



BHA18LTX

Manufacturer	Metabo
18v Cordless Rotary Hammer	
<u>Drill Diameter in:</u> •Concrete 23/32" •Steel 3/8" Soft wood 7/8" •Idle revolution 0-1100 /min •Hammer stop for drilling in rotary only mode and for screwdriving •Clockwise and anti-clockwise rotation •Metabo S-automatic torque limiting clutch •Metabo Vibratex (MVT) side handle for vibration dampening •Maximum impact rate 4900/min •Max. single blow energy (EPTA) 1.8 J •Impact power 131J/s •Bit retainer SDS-Plus	

metabo
work. don't play.



BS18LT

Manufacturer	Metabo
18v Cordless Drill/Driver	
•Maximum torque, soft 300.9 in-lbs •Maximum torque, hard 531 in-lbs •Adjustable torque 6.2-70.8 Nm <u>Drill Diameter in:</u> •Steel 1/2" •Wood 1 1/2" •Powerful 4 pole motor •Integrated working light •Belt hook and bit holder •Idle revolutions 0-4500 / 0-1600 /min •Chuck adapter 1/16" - 1/2"	

metabo
work. don't play.



BS18LTX

Manufacturer	Metabo
18v Cordless Drill/Driver	
•Maximum torque, soft 487 in-lbs •Maximum torque, hard 974 in-lbs •Adjustable torque 13 - 221 Nm •Pulse torque 531 in-lbs <u>Drill Diameter in:</u> •Steel 1/2" •Wood 2 9/16" •Powerful 4 pole motor •Integrated working light •Belt hook and bit holder •Idle revolutions 0-500 / 0-1700 /min •Chuck adapter 1/16" - 1/2" •Overload protection •Impuls mode	

metabo
work. don't play.



KSA-18LTX

Manufacturer	Metabo
18v Cordless Circular Saw	
•Swivel range from / to 0 °/+ 50° •Adjustable cutting depth 0 - 2 1/8" •Max cutting depth 90° - 2 1/8", 45° - 1 21/32" •Saw blade 0 x drilling 0 6 1/2 x 5/8 mm •Idle revolution 2700 /min •Integrated LED work light •Brake stops blade very quickly	

metabo
work. don't play.



SB18LTX

Manufacturer	Metabo
18v Cordless Impact Drill	
•Impuls mode •Integrated work light •Maximum torque, soft 487 in-lbs •Maximum torque, hard 974 in-lbs <u>Drill Diameter in:</u> •Concrete 5/8" •Steel 1/2" •Wood 2 9/16" •Idle revolution 0 - 500 / 0 - 1700 /min •Maximum impact rate 32300 /min •Powerful 4-pole motor •Chuck adapter 1/16 - 1/2" •Pulse torque 531 in-lbs •Adjustable torque 13 - 212 Nm	

metabo
work. don't play.



SSD18LTX

Manufacturer	Metabo
18v Cordless Impact Driver	
•High torque machine with low kick-back torque •Three speed/torque levels •Integrated work light •Idle revolution 0 - 2500 /min •Idling speed level 1 0 - 1000 /min •Maximum impact rate 3300 /min •Maximum impact rate level 1 2100 /min •Bit retainer hexagon recess 1/4"	

metabo
work. don't play.



W18LTX

Manufacturer	Metabo
18v Cordless Angle Grinder	
•Grinding wheel 4 1/2" •Idle revolution 8000 /min •Spindle thread 5/8" -11 UNC •Tool-free adjustable guard •Battery pack can be swiveled •Detachable dust filter •Overload protection •Electronic soft start •Restart protection	

metabo
work. don't play.



SSW18LTX

Manufacturer	Metabo
18v Cordless Impact Driver	
•High torque machine with low kick-back torque •Three speed/torque levels •Integrated work light •Idle revolution 0 - 2300 /min •Idling speed level 1 0 - 900 /min •Maximum impact rate 3000 /min •Maximum impact rate level 1 1900 /min •Bit retainer male square 1/2"	

metabo
work. don't play.



5.2Ah Battery System

•First 5.2Ah battery on the market •3 year warranty •18v •Charge level indicator •Impact protection built in •Ultra-M Technology •Intelligent battery management •Electronic single cell protection •Patented air cooled charging technology
--

Metabo Corded

metabo
work. don't play.



CS23355

Manufacturer	Metabo
2300 Watt Metal Chop Saw	
•Torque 160 in-lbs •Rated input power 1700 W <u>Maximum Cutting Dimension</u> •Steel bars 2 1/22 1/2" •Pipes 5" •Steel sections 4 1/2 x 5 1/8 mm •Motor & gear w/ ball bearing for high loads •Quick clamping device with variable mitre conversion from -15° up to 45° •High safety thanks to swiveling cutting guard •Safe working thanks to adjustable spark guide plate •Idle revolution 4100 /min •Maximum opening of vice jaws 9 3/8" •Adjustable cutting depth limiter •Spindle lock for easy disc change	

metabo
work. don't play.



W8115 Quick

Manufacturer	Metabo
800w Angle Grinder	
•Metabo S safety clutch •Tool free adjustable guard •Grinding wheel 4 1/2" •Rated power input 800w - output power 490w •Idle rev 10,000 /min •Rev at rated load 7,000 /min •Metabo quick system tool free disk change	

metabo
work. don't play.



WEF9125

Manufacturer	Metabo
--------------	--------

4 1/2-5" Flat Head Angle Grinder

- Overload protection
- Electronic safety clutch
- 7 position burst proof guard
- Side handle
- Max torque 18 in. lbs.
- No load speed 10,000 rpm
- Input watts 910
- Flat head gear box design
- Electronic soft start
- Max wheel diameter 5"
- Amps 8.0
- Arbor size 7/8"
- Lock on switch

metabo
work. don't play.



W820

Manufacturer	Metabo
--------------	--------

820w Angle Grinder

- Grinding wheel 4 1/2"
- Rated input power 820 w
- Output power 510 w
- Idle revolution 11000 /min
- Revolutions at rated load 7000 /min
- Spindle thread 5/8" - 11 UNC

metabo
work. don't play.



WEPBA14150

Manufacturer	Metabo
--------------	--------

1400w Electric Angle Grinder

- Best anti-vibration system
- Fastest brake system
- Metabo S safety clutch
- Metabo quick system for tool-free disc change
- Paddle switch with dead man function
- Tool-free adjustable guard
- Grinding wheel 6"
- Idle rev 9,000 /min
- Rev a rated load 9,000 /min

metabo
work. don't play.



BHE2243

Manufacturer	Metabo
--------------	--------

Electronic Rotary Hammer

Drill Diameter in:

- Concrete with hammer drills 7/8"
- Masonry with core bits 2 5/8"
- Steel 1/2"
- Soft wood 1 3/16"
- Idle revolution 0-1150 /min
- Revolutions at rated load 960 /min
- Hammer stop for drilling in rotary only mode and for screw driving
- Clockwise and anti-clockwise rotation
- Metabo S-automatic torque limiting clutch
- Rated input power 800W
- Output power 410W
- Impact power 166 J/s
- Bit retainer SDS-plus
- Max. single blow energy 2.3J
- Maximum impact rate 5400 /min

metabo
work. don't play.



KHE3250

Manufacturer	Metabo
--------------	--------

1 1/8" SDS Rotary Hammer w/ Rotostop

- Metabo Vibratex
- Metabo S torque limiting clutch
- Drill Diameter in:
- Concrete with hammer drills 1 1/4"
- Steel 1/2"
- Soft wood 1 3/8"
- Idle rev 0 - 1150 /min
- Rated power input 800w / output power 440w
- Max impact rate 4470 /min
- Max single blow energy 3.1 J - impact power 222 J/s

metabo
work. don't play.



KHE56

Manufacturer	Metabo
--------------	--------

Electric Combo Hammer

- Metabo Vibratex
- Electronic soft start
- Metabo S torque limiting clutch
- Torque 796 in-lbs
- Drill diameter in:
- Concrete w/hammer drills 1 25/32"
- Concrete w/core bits 2 9/16"
- Concrete w/core bits 3 15/16"
- Rated power input 1300w - output power 650w
- Max impact rate 2840 /min
- Mix single blow energy 8.5 J
- Impact power 402 J/s

metabo
work. don't play.



KHE-D28

Manufacturer	Metabo
--------------	--------

Electronic Combo Hammer

- Hammer stop for drilling in rotary only mode and for screwdriving
- Clockwise and anti-clockwise rotation
- Metabo S-automatic torque limiting clutch
- Quick change SDS plus hammer chuck & quick-action keyless chuck
- Torque 124 in-lbs
- Drill Diameter in:
- Concrete with hammer drills 1 1/8"
- Steel 1/2"
- Masonry with core bits 2 9/16"
- Soft wood 1 5/8"
- Rated input power 1010 W
- Output power 610 W
- Revolutions at rated load 1000 /min
- Rotation stop for chiseling
- Wear indication for carbon brushes

metabo
work. don't play.



KHED24

Manufacturer	Metabo
--------------	--------

Electronic Combo Hammer

- Metabo S torque limiting clutch
- Hammer stop for drilling in rotary only
- Rotation stop for chiseling
- Torque 106 in-lbs
- Drill diameter in:
- Concrete w/hammer drills 15/16"
- Steel 1/2"
- Soft wood 1 13/16"
- Rated power input 720w - output power 420w
- Max impact rate 4600 /min

metabo
work. don't play.



KHE76

Manufacturer

Metabo

Electronic Combo Hammer

- Metabo Vibrattech
- Electronic soft start
- Metabo S torque limiting clutch
- Torque 885 in-lbs
- Drill diameter in:
- Concrete w/hammer drills 2"
- Concrete w/core bits 3 5/32"
- Concrete w/core bits 5 29/32"
- Rated power input 1500w - output power 750w
- Max impact rate 2735 /min
- Mix single blow energy 11.9 J
- Impact power 542 J/s

Extension Cords

PRIME®



**12/3
Gauge**

Extension Cord	
Manufacturer	Prime
Sizes	50', 100'
•Water & oil resistant •Flame retardant •Ultra flexible •Abrasion resistant •Nickel-coated brass blades resist corrosion •Primelight indicator light •12/3 gauge	

PRIME®



**12/3
Gauge**

Triple Tap Extension Cord	
Manufacturer	Prime
Sizes	50', 100'
•Triple tap •Water resistant •Flame retardant •Ultra flexible •Abrasion resistant •Nickel-coated brass blades resist corrosion •Flexible temperature range (-58F - +221F) •Primelight indicator light •Lifetime warranty •12/3 gauge	

PRIME®



**12/3
Gauge**

GFCI Triple Tap	
Manufacturer	Prime
•Extra-heavy duty cord rated at 15A/125V1875W •Ground fault circuit interrupter protects against shocks •OSHA required & approved •Test & reset buttons •Over-sized plug, connector & strain reliefs prevent wire from separating •Water resistant •Flame retardant •Ultra flexible •Nickel-coated brass blades resist corrosion	